

FIRE-RATED DOORS

single leaf, 60 minutes



CODE : FD 800X2050 60	ERP : 211-014-001	CODE : FD 800X2150 60	ERP : 211-014-007
CODE : FD 900X2050 60	ERP : 211-014-002	CODE : FD 900X2150 60	ERP : 211-014-008
CODE : FD 1000X2050 60	ERP : 211-014-003	CODE : FD 1000X2150 60	ERP : 211-014-009
CODE : FD 1100X2050 60	ERP : 211-014-004	CODE : FD 1100X2150 60	ERP : 211-014-010
CODE : FD 1200X2050 60	ERP : 211-014-005	CODE : FD 1200X2150 60	ERP : 211-014-011
CODE : FD 1300X2050 60	ERP : 211-014-006	CODE : FD 1300X2150 60	ERP : 211-014-012

- Corner frame made of electro-galvanized steel sheet, 1.5 mm thick, Z-shaped, with four hinges on each side.
- Frame and door leaves painted in RAL 7035 shade.
- Other colors upon request.
- Two hinges, one of which is adjustable for automatic closing.
- Fixed safety pin, which penetrates the frame, on the side of the hinges.
- Fireproof knobs and mouthpieces in black color.
- Fire safety lock, reversible, CE marked, with plastic fireproof navel and special PATENT key.
- Heat-expandable tape, width 28mm, perimeter.
- Metal plate with construction and certification elements.
- Standard dimensions, width 800, 900, 1000, 1100, 1200, 1300, 1350mm, height 2050 and 2150mm.
- Door weight about 35kgr / m2 approximately.
- Certification according to EN1634-1
- UNIFORM port type
- Country of origin Italy.



Delivered in the following dimensions




(buildings openings):

80x205cm, 90x205cm, 100x205cm, 110x205cm, 120x205cm, 130x205cm
80x215cm, 90x215cm, 100x215cm, 110x215cm, 120x215cm, 130x215cm

● NOTES

- A safety lock is optional and charged extra.
- Change of color (RAL palette) is charged extra.
- The case is manufactured to be installed on the final floor.
- Every custom choice is charged accordingly.



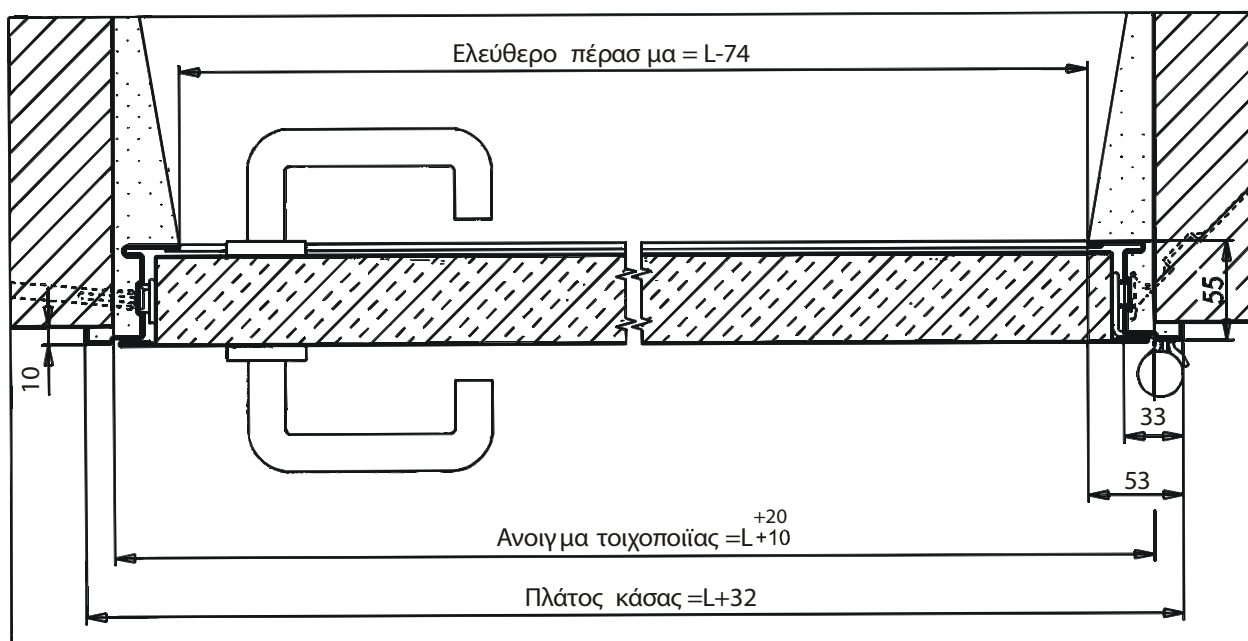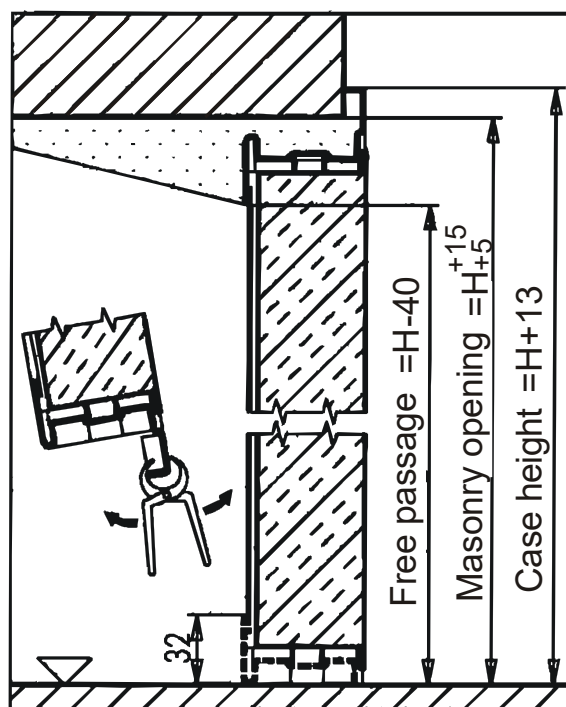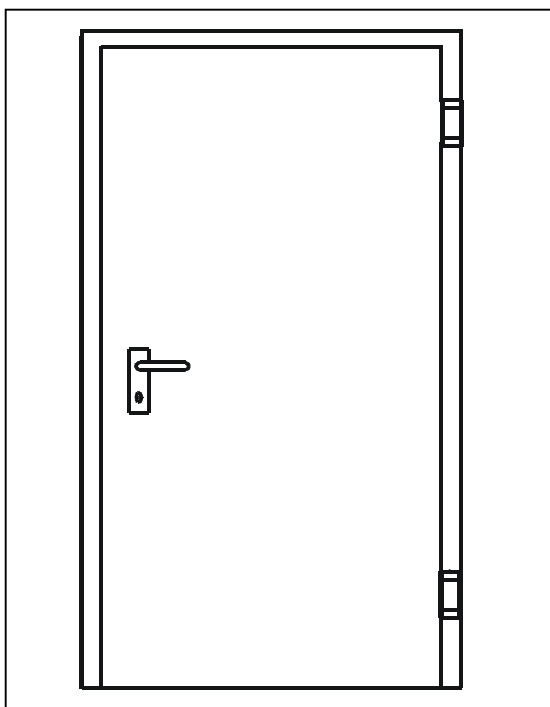

info@flamecontrol.gr

www.flamecontrol.gr

FLAMECONTROL

20 Sokratous St. Metamorfosi, 14451, Attica

T: +30 210 6208 500